



Professional Packaging Systems

2010 S. Great Southwest Parkway
Grand Prairie, Texas 75051
www.ProPac.com

Contact

Our Packaging Experts
solutions@propac.com
888-318-0083

Adco WM / WS High-Speed Mechanical or Servo Sleever


At a Glance

- Capable of speeds up to 350 sleeves per minute
- High-speed sleever designed for the most demanding production environments
- Easy-to-load inclined magazine
- Stainless steel construction

Pricing

Call us at 888-318-0083

Many options are available. Complete details will need to be finalized to determine requirements and final system costs. Work with your Pro Pac representative to build this machine to your specifications.

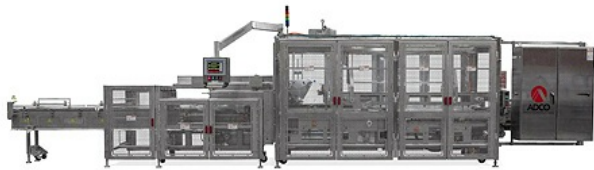

Reliable, Rugged, High-Speed Sleever Wraps Up to 350 sleeves per Minute

Rugged and dependable, available in both a mechanical version (WM) and a servo version (WS), Adco high-speed sleeveers are designed for the most demanding production environments.

Capable of speeds up to 350 sleeves per minute, Adco sleeveers are capable performers with the ability to run a wide range of sleeve sizes and styles including neck-through and gusset sleeves.

If you need to run multiple lanes, stack your products in layers or invert the top layer, our product handling experts are here to help.

Like all Adco machines, these wrap around sleeveers are constructed in stainless steel and are available in both standard and washdown configurations.

Benefits

Stainless steel construction and sanitary design improves cleanability and eliminates corrosion

High-speed capability maximizes productivity and reduces machinery requirements

Flexible and adaptable design protects your investment as products change

Smooth continuous motion design and rotary feeder improve speed and efficiency

Easy to load powered magazine reduces operator fatigue and increases run time

Advanced guard design keeps operators safe and maximizes maintenance access

Features

- Stainless steel construction
- Mechanical or servo drive system
- Fully automatic, continuous motion design
- Multi-head rotary sleeve feeder
- Fully adjustable with screw adjustments and digital readouts for size changes
- Horizontal powered magazine
- Nordson® ProBlue FLEX hot melt glue system
- Allen-Bradley PLC control system with color touch screen HMI
- Category 3 safety system with a fully-interlocked barrier guard package
- PackML programming
- Many options available upon request

Options

- Washdown construction
- Servo or Mechanical control
- Glue or lock style closure
- Product stacking infeed's including standard and top layer inverted
- Single or double lane configurations
- Nordson MOD melt on demand hotmelt glue system
- Extended length carton magazine
- PLC & HMI upgrades

Applications

- Frozen entrees
- Single pack trays, cups and bowls
- Fruit cup multi-packs
- Aseptic beverage multi-packs
- Beverage bottle multi-packs
- Consumer products

Carton Size Range

- Length of Opening: 9" to 9" (25 to 229mm)
- Width of Opening: 0.75" to 4" (20 to 101mm)
- Depth of Carton: 4" to 12" (101 to 305mm)

Specifications

- Electrical: 230/460 VAC, 3-Phase with ground (PE), 60 Hz, 30A
- Air: 3 CFM @ 95 PSI

Please [contact Pro Pac](#) or call 888-318-0083 for your cartoning equipment.