



Professional Packaging Systems

2010 S. Great Southwest Parkway
Grand Prairie, Texas 75051
www.ProPac.com

Contact

Our Packaging Experts
solutions@propac.com
888-318-0083

Econoseal V-System Vertical Cartoner

At a Glance


- Mechanically driven, intermittent motion vertical cartoner
- Erects, loads, and closes top load cartons
- Up to 40 cartons per minute
- Sanitary construction (essentially stainless steel)

Buy your cartons from us, and get a discount on this Econoseal carton former!

Pricing

Call us at 888-318-0083

Many options are available. Complete details will need to be finalized to determine requirements and final system costs. Work with your Pro Pac representative to build this machine to your specifications.

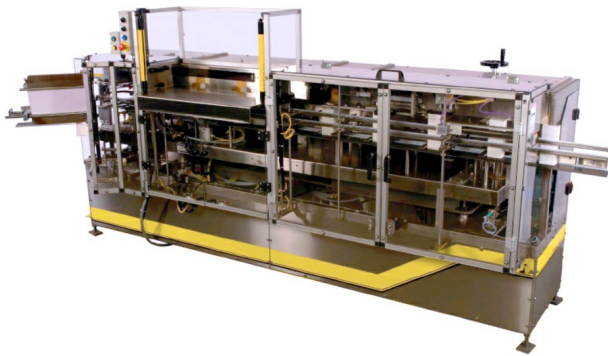

Erect, Load, and Close Top Load Cartons

The Econoseal V-System is a mechanically driven, intermittent motion vertical cartoner for erecting, loading, and closing top load cartons at speeds of up to 40 cartons per minute.

Operation

1. Flat, pre-glued end load style carton is pulled from the carton supply magazine.
2. Carton bottom is closed (tuck or glue methods available) and the carton is then presented vertically to the product loading area.
3. Product is manually or automatically vertically loaded into carton.
4. Machine cycle is initiated, and the top of the carton is closed (tuck or glue methods available).
5. Completed carton is automatically delivered from the machine to a convenient working height.

Features

Speed: Up to 40 cartons per minute

Sanitary construction (essentially stainless steel)

Intermittent motion

Up to 40 cartons per minute

PLC controls

Accommodates glue or tuck closure

Easy access to carton magazine

Adjustable 4 chain transport system to enhance carton squareness

Hand crank adjustment for fast size changeover

Straight back discharge

Options

Extended or reduced sized cartons outside the standard range

Adjustable magazine

3 light beacon

5' extended carton magazine

Ink print or deboss coding

Delivery shelf for discharge

Auto bottom box provision

CE guarding

Carton Size Range

Min: 1" x .75" x 2.5" (25 x 19 x 64mm)

Max: 8" x 3" x 10" (203 x 76 x 254mm)

Specifications

Electrical: 220 volts, 50/60 Hz, Single phase

Air: 80 psi (5.5 bar), volume consumption approximately 3.5 CFM 16.8 SCFM (90 Liters/min)

Weight: Approximately 1,295 lbs (590 kg)