



Professional Packaging Systems

2010 S. Great Southwest Parkway
Grand Prairie, Texas 75051
www.ProPac.com

Contact

Our Packaging Experts
solutions@propac.com
888-318-0083

Econoseal Wrap-Around Spartan Case & Tray Loader

At a Glance


- Wrap-around system for cartons, cases and trays
- Up to 20 cases and trays per minute
- Heavy-duty welded stainless frame

Buy your case and tray material from us, and get a discount on this Econoseal cartoner!

Pricing

Call us at 888-318-0083

Many options are available. Complete details will need to be finalized to determine requirements and final system costs. Work with your Pro Pac representative to build this machine to your specifications.

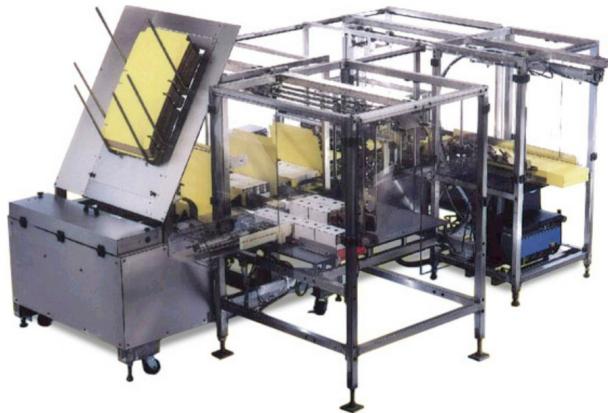

Rugged Automatic Horizontal Cartoner

The Econoseal Wrap-Around Spartan is a compact wrap-around system for cartons, case and trays that can run at speeds of up to 20 cartons per minute.

Operation

1. Forms blank (corrugated or paperboard) into a "U" shape and transports it to product load station.
2. Product loaded manually or by optional automatic product loading/collating device.
3. Loaded package moves through series of closure/end flap gluing stations. Gluing is done by a hot melt extruding system.
4. For full wrap-around style, right angle transfer device accommodates side joint (flap) gluing.
5. Carton/Case/Tray is discharged as a completed package.

Features

Sanitary Construction (essentially stainless steel)
Heavy-duty, welded stainless frame
PLC Controls
Broad size range
Simple and fast size changeover
Accommodates both corrugated and paperboard materials
Up to 20 cartons/cases/trays per minute

Options

Extended or reduced sized cartons outside the standard range

Adjustable magazine

Infeed belt or bucket conveyor

Product infeed accessory

Collator upstacker/downstacker

3 light beacon

5' extended carton magazine

CE guarding

Case & Tray Size Range

Min: 8" x 5" x 4.5" (203 x 127 x 115mm)

Max: 24" x 15" x 14" (610 x 380 x 355mm)

Supported Case & Tray Styles

Full wrap-around style blanks

Open top wrap-around style trays

Paperboard or corrugated

Specifications

Electrical: 220 volts, 50/60 Hz, Single phase

Air: 80 psi (5.5 bar), volume consumption approximately 6.2 CFM, 33 SCFM (175 Liters/min)

Weight: Approximately 3,500 lbs (1,590 kg)