




Professional Packaging Systems

2010 S. Great Southwest Parkway
Grand Prairie, Texas 75051
www.ProPac.com

Contact

Our Packaging Experts
solutions@propac.com
888-318-0083

Pearson BF30-2PB Bliss Former

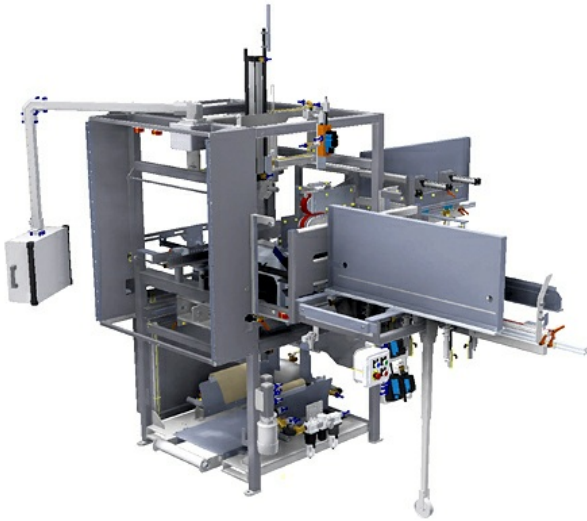

At a Glance

- Up to 30 cases per minute
- Ideal for liquid bag-in-box applications
- Gravity fed magazine ensures that each blank is in proper position

Buy your [boxes](#) from us, and get a discount on this Pearson bliss former!

Pricing

Call us at **888-318-0083**

Many options are available. Complete details will need to be finalized to determine requirements and final system costs. Work with your Pro Pac representative to build this machine to your specifications.

Bliss Former for Liquid Bag-in-Box Applications

Pearson BF30-2PB 2-piece bliss former is ideally suited for liquid bag-in-box applications. Sturdy, double-layer bottom boxes provide high stacking strength and reduce the risk of product damage commonly caused by internal corrugate flanges.

With speeds up to 30 CPM, combined with its rugged construction, the BF30-2PB is field-proven for 24/7 applications.

Dual gravity fed magazines ensure that each case component is accurately presented for pick off. To establish consistent glue compression and case squareness, the active forming section impacts the glue lines as opposed to rubbing over it.

For high-speed operations, an optional high-capacity Automatic Stack Transfer System is available. Advanced features such as high-visibility machine status lighting, non-contact interlocks, CAT-3 Safety Circuits and an easily accessible grace port are standard on the machine.

Features

Gravity Fed Magazine: Gravity fed magazine ensures that each blank is in proper position for picking without having to worry about proper angles and placement of boards.

Powered End-Panel Magazine: The powered end-panel magazine with following paddle ensures that each end-panel is accurately presented for pick off by controlling the pressure between the end-panels and the restraining clip.

Active Forming Section: The active forming section ensures consistent glue compression and square cases by impacting the glue lines as opposed to smearing them.

Vertical Case Forming: Vertical case forming eliminates having to reposition the orientation of the box for introduction onto the customer's conveyor resulting in a smaller footprint of the machine.

User-Centric HMI: Changeovers are supported by the industry's most advanced HMI with an uncluttered design, intuitive navigation, interactive changeover and fault-recovery guides, live sensor maps, and advanced maintenance features. Scales, pointers and quick release handles ensure additional tools are not necessary. A trained technician can complete a changeover in under 45min.

Reliable Non-Contact Interlocks: Eliminates misalignment of guard door interlocks which prevents problems common to keyed interlocks.

High-Visibility Machine Status: A standard four-light LED beacon provides high-visibility of machine status.

Easily Accessible Grace Port: Grace ports provide convenient communication access and 110V convenience outlet at the outside of the machine's electrical cabinet.

Auxiliary Operator Station: A remote operator station enables convenient machine control on both sides of the conveyor.

Remote Access Capability: Allows Pearson's support team on-demand access to the equipment's PLC and HMI through a secure VPN connection via an eWON router (ISECOM STAR and ISO27001 certified) to support emergency troubleshooting and reduce on-site visits.

Options

Air conditioner

Custom case range

High-capacity stack transfer system

High-capacity adhesive feeder

Low temperature environment

Plant level ethernet connection

Please [contact Pro Pac](#) or call 888-318-0083 for your bliss formers.

Specifications

Speed	Up to 30 cases/min
Min. Case Size	8"L x 8"W x 4"H
Max. Case Size	25"L x 12"W x 14"H
Sealing	Hot melt glue
Changeover	Manual, supported by HMI graphical guided instructions and changeover map, scales, pointers, and quick release handles 45 min (estimate for trained technician)
Construction	Heavy-duty welded tubular frame Low pressure washdown Mild steel Stainless steel
Machine Size Range (ft)	16.8'L x 14.8'W x 10.1'H
Controls	Allen-Bradley CompactLogix PLC PackML Compliant PanelView Color HMI
Air Requirements	80 PSI
Power Requirements	460 VAC
Disconnect Sizes	30 Amps
Air Consumption	3.59 SCF/Cycle
FLA (Full Load Amp) of Base Machine	20 Amps
Case Support	Bliss shipper

Please [contact Pro Pac](#) or call 888-318-0083 for your bliss formers.