




## Professional Packaging Systems

2010 S. Great Southwest Parkway  
Grand Prairie, Texas 75051  
[www.ProPac.com](http://www.ProPac.com)

## Contact

Our Packaging Experts  
[solutions@propac.com](mailto:solutions@propac.com)  
888-318-0083

# Easteys TB-2 Top Belt & Bottom Belt Case Taper

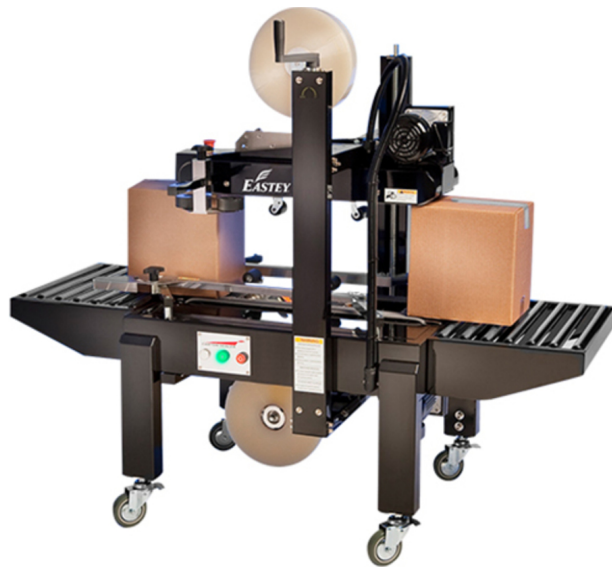

## At a Glance

- Top and bottom drives and dual mast for greater tape head stability
- Ideal for tall and narrow or over-filled cases
- Four drive belts work in unison to consistently move your cases

Buy your [case sealing tape](#) from Pro Pac, and get a discount on this Easteys case taper!

## Pricing

Call us at **888-318-0083**

Many options are available. Complete details will need to be finalized to determine requirements and final system costs. Work with your Pro Pac representative to build this machine to your specifications.

## Taping Tall, Narrow, and Over-Filled Cases

The Easteys TB-2 case taper utilizes top and bottom drives and a dual mast for greater tape head stability, ideal for tall and narrow or over-filled cases.

The operator friendly Easteys TB-2 top and bottom belt case taper is designed for large run case sealing. The top and bottom drives are ideal for tall and narrow uniform cases and heavier cases up to 85 lbs. No air is required to run the TB-2 case taping system so it can be placed anywhere in the plant.

Four drive belts work in unison to move your cases consistently through for a strong and consistent seal. The TB-2 utilizes a dual mast with twin lead screws for greater tape head stability and adjustable side guides to center each case. The unit also features top compression rollers to stabilize the case and push the top flaps together, making it a great solution for over-filled cases. The system is designed to keep maintenance to a minimum and provide a fast and efficient alternative to hand taping.

The Easteys TB-2 offers fast and easy case changes and flexibility for boxes 5" in length and greater. Adjustments can be made on the fly with easy hand tighten knobs and cranks. TB-2 utilizes Easy-Taper Quick-Load top and bottom tape cartridges and will seal boxes as narrow as 6.0" wide and as low as 4.5" tall.

## Increase Your ROI

Top and bottom tape heads lift out for easy threading and accept 2" wide pressure-sensitive tape as a standard, or can be ordered with 3" tape heads. Operating the Easteys TB-2 case taping machine can be learned in minutes, avoiding breaks in production and downtime, saving your company money and

increasing your ROI.

## Rugged Workhorse

CE approved dual drive motors and aggressive industrial-strength top and bottom drive belts make the TB-2 a workhorse taper that will stand up to your toughest challenges. Each case taping machine is made from 12 gauge steel to withstand the most rugged applications. A powder coated exterior protects the machine from abusive conditions and guarantees years of use.

## Industrial Strength Operation

Dual 1/4 HP side drive motors with single top drive motor, aggressive industrial strength drive belts, and roller tables make SB-TB-2 a workhorse that will stand up to your toughest challenges. Each case taping machine is made from 12 gauge steel that will withstand even the most rugged applications. A powder coated exterior protects the machine from abusive conditions and ensures years of use. The SB-TB-2 is CE certified, so users can be confident it will consistently provide reliable, high quality case sealing.

## Features

- Utilizes Eastey's Easy-Taper tapehead
- Dual mast for tape head stability
- Top compression rollers
- Front and rear roller pack tables
- Plug-in and go operation
- Powder coated 12 gauge steel
- Adjustable side guides
- Industrial strength top and bottom belts
- Adjustable leg extensions
- Fast and easy box size changes
- Low maintenance
- Casters for transportation within plant

## Case Sizes

Minimum: 5"L x 6"W x 4.5"D

Maximum: Infinite L x 19.5"W x 19.5"D

## Options

3" tape head accepts 3" wide tape rolls

Please [contact Pro Pac](#) or call 888-318-0083 for your case sealing equipment.

## Specifications

Sealer Type	Uniform top and bottom belt, top and bottom case sealer
Machinery Makeup	Industrial strength 12 gauge steel, powdered coated for durability
Belt Speed	75 feet/per minute
Tape Speed	30 cases/per minute, depending on box size and operator efficiency
Height Adjustment	Standard adjustable legs for 24.3" to 32.3" conveyor heights
Tape Size	2" wide pressure sensitive tape, up to 15" diameter rolls, optional 3" wide tape
Tape Cartridge	Proven design requires no lubrication, tips back for simple tape threading, removable for maintenance and interchangeable with top or bottom cartridges
Air Requirements	None
Electrical Requirements	110 VAC, 60Hz, 4.0A
Agency Approvals	CE Certification

Please [contact Pro Pac](#) or call 888-318-0083 for your case sealing equipment.