




## Professional Packaging Systems

2010 S. Great Southwest Parkway  
Grand Prairie, Texas 75051  
[www.ProPac.com](http://www.ProPac.com)

## Contact

Our Packaging Experts  
[solutions@propac.com](mailto:solutions@propac.com)  
888-318-0083

# Syntegon Sigpack HRD Horizontal Flow Wrapper

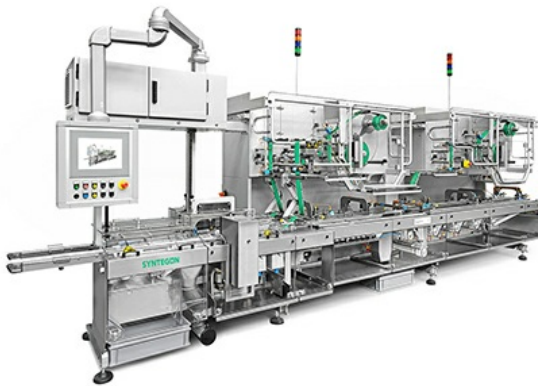

## At a Glance

- Dual-lane horizontal pillow pack flow wrapper
- Robust servo machine with modular design suitable for 24-hour operation
- Tool-free format changes via digital displays and quick-action closures
- Up to 2 x 1,500 packages per minute

## Pricing

Call us at 888-318-0083

Many options are available. Complete details will need to be finalized to determine requirements and final system costs. Work with your Pro Pac representative to build this machine to your specifications.

## Robust, Super High-Speed Flow Wrapper Built with Two Lanes

The Syntegon Sigpack HRD dual-lane horizontal pillow pack flow wrapper operates with two independent packaging lane lines.

## Construction

The robust servo machine with modular design is suitable for 24-hour operation. It ensures optimal system integration. The strict separation of product/ packaging material handling and drive elements meet the highest hygiene standards. Maintenance is minimal due to lifetime lubrication of components. The dual-lane high-speed pillow pack machine is available in left-hand and right-hand version.

## Operation

The Sigpack HRD is fitted with a large touch screen, which is connected to the machine housing via a moveable swivel arm. The status of operation, product-specific parameters, faults and troubleshooting measures are individually displayed. During standard operation, the machine can be operated by a separate keypad. Both packaging lines are operated from one operator side.

## Benefits

High flexibility with maximum productivity  
Hygienic design with optimal accessibility for maintenance and cleaning  
High efficiency with fully automatic film splicer (HPS)

Optimal ease of use and operational safety  
Tool-free format changes via digital displays and quick-action closures  
Perfect integration with distribution and infeed variants (Seamless System)

Please [contact Pro Pac](#) or call 888-318-0083 for your flow wrapping equipment.

## Specifications

Capacity	Output: Up to 2 x 1,500 bags/min Film Speed: Up to 2 x 150 m/min
Product Dimensions	Length: 25 - 100 mm Width: 16 - 50 mm Height: 6 - 24 mm

Please [contact Pro Pac](#) or call 888-318-0083 for your flow wrapping equipment.