




## Professional Packaging Systems

2010 S. Great Southwest Parkway  
Grand Prairie, Texas 75051  
[www.ProPac.com](http://www.ProPac.com)

## Contact

Our Packaging Experts  
[solutions@propac.com](mailto:solutions@propac.com)  
888-318-0083

# Fanuc DR-3iB/6 Stainless Pick-and-Place Delta Robot

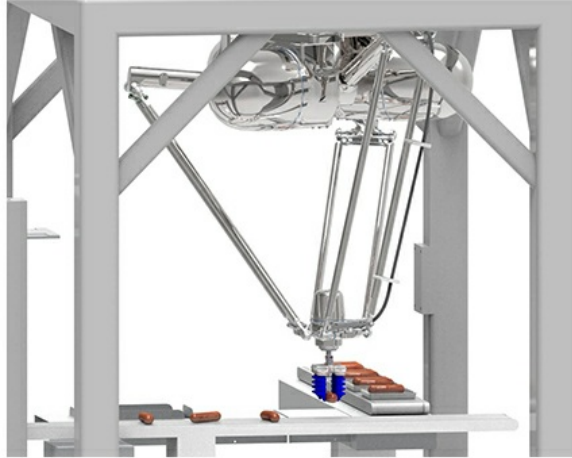

## At a Glance

- Max Payload: 6 kg
- Reach: 1200 x 450 mm
- Axis: 4

## Pricing

Call us at 888-318-0083

Many options are available. Complete details will need to be finalized to determine requirements and final system costs. Work with your Pro Pac representative to build this machine to your specifications.

## Stainless Food-Grade Robot Designed for Placing Primary Food Products

The Fanuc DR-3iB/6 stainless steel food-grade Delta robot is specifically designed for picking and packing primary food products. Rated IP69K, this Fanuc robot meets USDA and FDA food safety standards, and sets a new benchmark for robotic food handling in terms of payload, speed, reach and sanitation.

The Fanuc DR-3iB/6 stainless robot features a fully enclosed stainless steel body that is resistant to the chemicals, high-pressure, and high temperatures required in strict wash-down environments found in bakery, cosmetics, dairy, pharmaceutical and protein industries.

## Specifications

Max Payload: 6 kg  
Reach: 1200 x 450 mm  
Axis: 4

## Features

**Easy to Clean** The Fanuc DR-3iB/6 Stainless robot's mirror-like surface finish ensures that any microbial contaminants can be washed away cleanly.

**More Throughput** The Fanuc DR-3iB/6 Stainless robot has a 1200mm reach and a 450mm height, with a

powerful four-axis design allowing it to handle 6kg payloads at high speeds.

**Latest R-30iB Plus Controller** The Fanuc DR-3iB/6 Stainless robot operates with Fanuc's R-30iB Plus controller with integrated intelligent functions such as iRVision, Force Sensing, Robot Link, Collision Guard and Zero Down Time (ZDT).

## IP69K Rated

Mirror-like surface finish ensures easy cleaning

Resistant to chemicals and high pressure / temperatures required in strict wash-down environments

Food safety design with NSF H1 food grade lubricant

## USDA/FDA Standards

NSF H1 food grade lubricant

Secondary oil catch basins with viewing windows to monitor potential leaks

Self-draining surfaces

Combines Fanuc's industry-leading performance and reliability with a food-safe stainless steel construction

Designed to help maximize production efficiencies without compromising food safety

Please [contact Pro Pac](#) or call 888-318-0083 for your robotic equipment.