




## Professional Packaging Systems

2010 S. Great Southwest Parkway  
Grand Prairie, Texas 75051  
[www.ProPac.com](http://www.ProPac.com)

## Contact

Our Packaging Experts  
[solutions@propac.com](mailto:solutions@propac.com)  
888-318-0083

# Robopac Rotoplat 508/708 Low-Profile Semi-Auto Turntable Stretch Wrapper

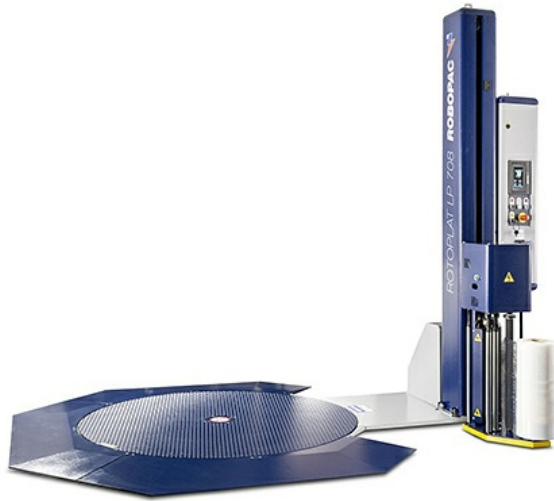

## At a Glance

- Ultra-low 1.18 inch turntable
- Max load weight 2600 lbs
- Max load height: 87 inches
- Up to 40 loads per hour

## Pricing

Call us at 888-318-0083

Many options are available. Complete details will need to be finalized to determine requirements and final system costs. Work with your Pro Pac representative to build this machine to your specifications.

## Low Profile Stretch Wrapper for Smooth Operation

The Robopac Rotoplat low-profile turntable stretch wrapper is built to streamline pallet wrapping. The Rotoplat 508/708 low profile stretch wrapper enhances operator convenience while maximizing floor space. With a turntable height of just 1.18 inches, this semi-automatic Robopac stretch wrapper is designed for operations using hand pallet trucks or forklifts, with access from any side.

This low-profile Rotoplat 508 or 708 stretch wrapping solution is ideal for high-volume facilities looking to improve safety, speed, and reliability on the packaging line.

## Highlights

**Ultra-Low 1.18" Turntable** Reduces loading effort and avoids damage from forklift forks.

**Ramp-Friendly Access** Compact ramps save space and improve operator efficiency.

**Patented Disc Rolling System** Provides long-term durability and smoother operation.

**Cube Technology** Cut film use by 30% to 55%, improve containment, and protect product integrity.

**R-Connect Remote Monitoring** Track performance and maintenance needs in real time.

**User-Friendly Interface** Intuitive controls reduce training time and ensure consistent wrapping.

## Features

**Low Profile Base** Low thickness base allows easy loading by pallet jack or forklift. Shorter ramps save valuable floor space.

**R-Connect** R-Connect provides usage and performance data via the cloud. Meet Industry 4.0 demands with performance monitoring and optimization at your fingertips. R-Connect empowers you with actionable insight to promptly investigate alarms, adjust parameters, improve performance, reduce down time.

**Color Touch Screen** The high performance 7-inch color touch screen with icons specifically designed and created by Robopac has led to the implementation of the multi-level control function.

**PVS Carriage** Powered stretch system controlled by two motors. Stretch ratio adjustable from panel board from 150-400%. Force to the load controlled by patented electronic device and adjustable from panel board.

### Film Delivery System

- Friction roller drive
- 250% fixed gear pre-stretch
- Variable electronic wrapping force
- 20" Standard film width (30" option)

### Safety Features

- Anti-fall device on carriage
- Safety stop on roll carriage
- CE Compliant

Please [contact Pro Pac](#) or call 888-318-0083 for your stretch wrapping equipment.

## Specifications

Production Speed	Up to 40 loads per hour
Turntable Speed	5 - 12 RPM
Turntable Size	65" diameter
Max Pallet Load Height	87" (110" available)
Max Pallet Load Weight	2600 lbs
NEMA 12 Enclosure	Standard
Turntable Drive	1 hp VAC
Power	120V, 14 amp, 60 Hz, 1 PH

Please [contact Pro Pac](#) or call 888-318-0083 for your stretch wrapping equipment.