



## Professional Packaging Systems

2010 S. Great Southwest Parkway  
Grand Prairie, Texas 75051  
[www.ProPac.com](http://www.ProPac.com)

## Contact

Our Packaging Experts  
[solutions@propac.com](mailto:solutions@propac.com)  
888-318-0083

# Ossid 500Li Stretch Tray Overwrapper

## At a Glance


- Ideal for fruits, vegetables, low-moisture proteins, and other food products
- Consistent tightly wrapped packages
- Foam belts for delicate products

Buy your [tray wrapping film](#) from us, and get a discount on this Ossid tray sealer!

## Pricing

Call us at 888-318-0083

Many options are available. Complete details will need to be finalized to determine requirements and final system costs. Work with your Pro Pac representative to build this machine to your specifications.

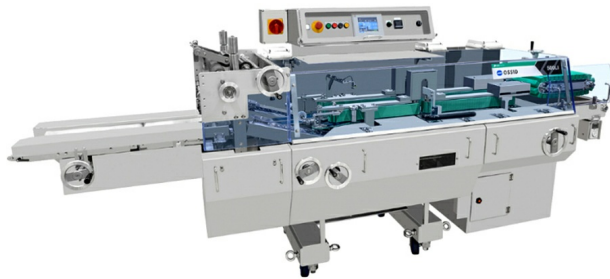

## Tuck and Fold Tray Packaging for Fresh Food Products

The Ossid The 500Li is a cost-effective tuck and fold tray overwrapper, producing tightly wrapped case-ready packages at speeds up to 60 packages per minute.

This tuck and fold tray wrapper is ideal for fruits, vegetables, low-moisture proteins, and other food products.

Streamline your packaging process by switching from an elevator to this Ossid in-line tray wrapping style machine. Pair the Ossid 500Li with an Ossid Weigh Price Labeler (WPL) to increase your packaging efficiency even more.

## Leading Edge Technology for Produce and Protein Packaging

The Ossid 500Li gripper chain system consistently stretches films to produce tightly wrapped packages. Foam belts ensure protection of delicate products. Servo driven technology and microprocessors reduce downtime and maintenance. The small footprint is ideal for space-constrained environments.

## Features & Benefits

HMI enables delivery of OEE data

Easier to operate than other overwrap packaging machines

Gripper chain system consistently stretches films to produce tightly wrapped packages

Product changeover in less than two minutes

Runs at speeds up to 60 packages/minute

Runs tray sizes #2 to 8" x 15" standard

PVC stretch film capable

Stainless steel construction

Servo driven technology and microprocessors reduce downtime and maintenance

No air or water utilities required

Ideal for space-constrained environments

Sealing unit pressure belt for enhanced sealing characteristics

Custom maintenance reminder screen

## Options

Extended bottom seal conveyor (double the length of standard seal conveyor) helps to maintain high speeds

Print registration

## Specifications

Length: 128" (3,270mm)

Height: 52" (1,321mm)

Width: 43" (1090mm)

Electrical: 208/230VAC, 30amp, 3phase

Please [contact Pro Pac](#) or call 888-318-0083 for your tray packaging equipment.