




Professional Packaging Systems

2010 S. Great Southwest Parkway
Grand Prairie, Texas 75051
www.ProPac.com

Contact

Our Packaging Experts
solutions@propac.com
888-318-0083

Batching Systems Bagmaster C295 VFFS Bagging Machine

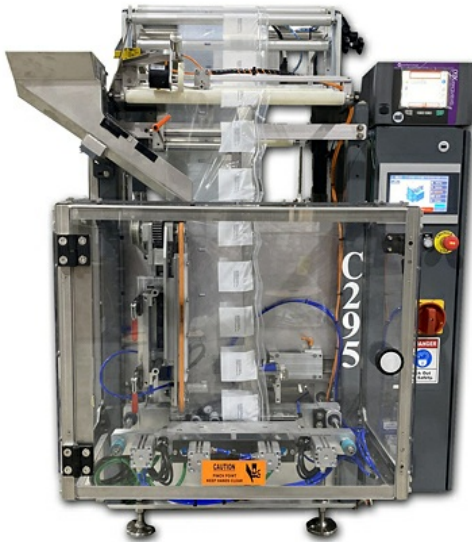

At a Glance

- Produces up to 50 bags per minute
- Specifically designed for heavy-duty applications
- Packages food and non-food products in bags up to 11.5 inches wide

Pricing

Call us at 888-318-0083

Many options are available. Complete details will need to be finalized to determine requirements and final system costs. Work with your Pro Pac representative to build this machine to your specifications.

Fast Industrial VFFS Bagging

Batching Systems Bagmaster C295 vertical bagging machine uses centerfold or pre-applied recloseable zipper film and is specifically designed and engineered for heavy-duty industrial applications.

This Bagmaster C295 bagging process fills product into the bag being formed through the side of the bag. This process produces a bag without a back seal for full-panel graphics on the front and back of the bag, enhancing market appearance. Header and hole punch options make an attractive retail package.

Batching Systems Bagmaster C295 vertical form, fill and seal bagging systems produces up to 50 bags per minute.

Bagmaster C295 Benefits

Flexibility: Runs a variety of films including polyethylene and laminate film structures with impulse or resistance sealing systems.

Versatility: System integration to a variety of packaging machines. Designed for short or long production runs. Does not require expensive tooling for different film widths.

Durability: Specifically designed for heavy duty applications. Utilizing 30 years of experience in frozen food, hardware, toy and industrial product applications.

Speed: Runs up to 50 cycles per minute.

Electronics: Controls architecture implemented in accordance with PackML and PackML Tags to provide standardized integration of upstream and downstream equipment. Includes a standard 10.4" operator

friendly color touch screen.

Ergonomics: Compact footprint with low overall height and easy access to interior of machine.

Cost Savings: Produces bags from flat web material, typically providing cost savings of approximately 75% when compared to using pre-made bags.

Value: Increased output for all your packaging needs, resulting in cost effective, efficiently filled packages.

Features

Bagmaster controls including 10.4" color touchscreen

Painted, welded tubular steel machine frame

Servo motor-driven film pull belts and cross jaw

Web encoder

End-of-film sensor

Machine guarding with safety interlocks

Electrical synchronization with dosing system

Product-in-jaw safety circuit

Lined product catch plates above cross seal jaws

Bag air expellers

Product infeed chute

Interface for printer

Interface for take-away-conveyor

Options

Registration mark sensor

Warning beacon

Hole punch

Header seal

Bag support shelf

Thermal printer

Perforation

Tear notch

cUL listed electrical control panel

Cell pack

Packaging Material

Film thickness: 60 - 120 micron (2.4 - 4.7 mil)

Max roll outside diameter: 508mm (20")

Roll core diameter: 73-77mm (3")

Package Dimensions

Bag width: 80mm (3.2") - 295mm (11.5")

Bag length: 75mm (3.0") - 295mm (11.5")

Machine Control & Operator Interface

Power Panel 500 with Intel Atom Z510 processor

Color touch screen: 265mm (10.4")

Proximity sensors: Operated via field bus

Specifications

Power: 208V, 3PH, 60Hz @25A

Air: 8 cfm @ 80-100 psi clean dry air

Machine Weight: Approximately 1,400 lbs

Machine Dimensions

Width: 990mm (39")

Depth: 1,345mm (53")

Height: 1,160mm (46")

Please [contact Pro Pac](#) or call 888-318-0083 for your vertical form fill seal bagging equipment.