




Professional Packaging Systems

2010 S. Great Southwest Parkway
Grand Prairie, Texas 75051
www.ProPac.com

Contact

Our Packaging Experts
solutions@propac.com
888-318-0083

BestPack CRX Random Case Indexer

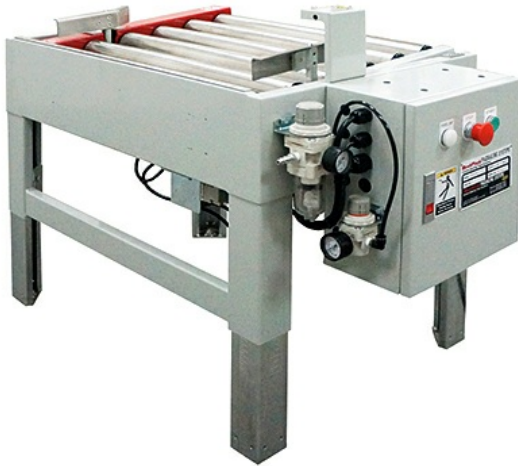

At a Glance

- Separates and times random cartons
- CRX indexer plus RS or RQ case sealer creates fully-auto random case sealing system
- Up to 10 cases per minute

Pricing

Call us at 888-318-0083

Many options are available. Complete details will need to be finalized to determine requirements and final system costs. Work with your Pro Pac representative to build this machine to your specifications.

Quad-Belt Drive Provides Carton Stability and Effective Sealing

The BestPack CRX centering and timing indexer functions in front of modified RS and RQ top and bottom semi-automatic random case sealers. Combining the CRX indexer and a case sealer will function as a fully automatic random carton sealing system.

Adjustable timer connected to powered rollers for random carton space separation allows the carton to feed completely through the sealer before allowing the next random sized carton in to the sealer.

This application requires the top flaps to be closed or tabbed closed by either a label or a small piece of tape before being completely sealed top and bottom by the random sealer. The two units cost much less than a standard fully automatic random sealer and has a smaller footprint where space may be an issue.

All BestPack units are available in standard baked enamel finish and food grade 304 stainless steel for 21 CFR 110 compliance.

Features

Heavy-duty 2mm CNC cut and welded frame including upper welded legs.

Random self-centering arms center cartons before feeding into the case sealer.

Powered rollers with a drop and stop feature for positive carton timing into the RS or RQ sealer.

Heavy-duty maintenance free oil-less air cylinder.

UL approved electrical parts.

Options

Locking casters

Spare tape head
Safety gates
On / off switch
Leg extensions

Power & Air

Power: 110 Volts, 60 Hz

Air: 90 psi, 5 scfm

Please [contact Pro Pac](#) or call 888-318-0083 for your case sealing equipment.

Specifications

Model	Machine Dimensions	Case Length	Case Width	Case Height	Conveyor Height	Cases per Minute	Shipping Weight
CRX20H	39.5"L 22.5"W 25.0"H	9.0" - 30.0"	6.3" - 20.0"	4.0" - 21.0"	20.5" - 30.0"	Up to 10	260 lbs

Please [contact Pro Pac](#) or call 888-318-0083 for your case sealing equipment.