




Professional Packaging Systems

2010 S. Great Southwest Parkway
Grand Prairie, Texas 75051
www.ProPac.com

Contact

Our Packaging Experts
solutions@propac.com
888-318-0083

Little David LD-16A Automatic Uniform Case Sealer

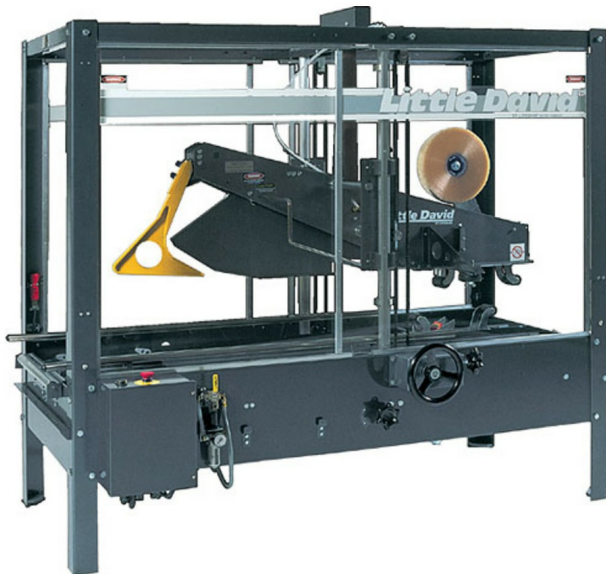

At a Glance

- Automatically tape uniform case sizes all day, all year
- Low maintenance
- Quick payback
- UL listed
- Simple 3-adjustment operation
- Interchangeable tape cartridges
- Heavy duty steel construction
- Reliable 24/7 operation

Buy your [case sealing tape](#) from Pro Pac, and get a discount on this Little David case taper!

Pricing

Call us at 888-318-0083

Many options are available. Complete details will need to be finalized to determine requirements and final system costs. Work with your Pro Pac representative to build this machine to your specifications.

Rugged, Reliable Automatic Case Taping

All day, all year reliability is what you can expect from this LD-16A Uniform case sealer. This heavy-duty fully automatic top and bottom case sealer is perfect for applications involving large runs of boxes. Box adjustments can be made in less than one minute. Plug-in operation and minimal operator training make this compact, 77" length sealer an assembly-line workhorse. Also available in bottom belt and side belt.

Features

- Tapes boxes in a variety of sizes
- Can be ordered for 2" or 3" wide tape
- Plug in operation
- Minimal operator training required
- Sealed drive system
- CaseLocker ST tape cartridge requires no lubrication
- Continuous belt drive
- Up to 80' per minute (24.4 m/min.)

Safe

- UL listed
- Safety doors automatically shut down machine when opened
- Knife guard system of the CaseLocker ST tape cartridge exposes blade only when the rollers are

depressed

Specifications of the LD-16A

Width: 77" (196 cm)

Depth: 37.25" (95 cm)

Height: 70" (178 cm)

Weight: 650 lbs (295 kg) uncrated

Electrical: 110 VAC, 60 Hz, single phase, 10 Amps. Other voltages available.

Air: 4 SCFM @ 70 psi

Specifications of the LD-16B

Width: 94" (239 cm)

Depth: 43.25" (110 cm)

Height: 78" (198 cm)

Weight: 850 lbs (386 kg) uncrated

Electrical: 110 VAC, 60 Hz, single phase, 10 Amps. Other voltages available.

Air: 4 SCFM @ 70 psi

Reliable Performance Warranty

1 year all components

2 year warranty for gear reducer and motor

3 year warranty for tape cartridge

(Moving and wear parts are not included, other restrictions may apply)

Please [contact Pro Pac](#) or call 888-318-0083 for your case sealing equipment.

Case Size Range

Model	Tape Width	Description	Case Length	Case Width	Case Height
LD-16A	2"	Bottom Belt Drive	8" - 24"	4.5" - 20"	4.5" - 20"
LD-16A-SS	2"	Stainless Steel Bottom Belt Drive	8" - 24"	4.5" - 20"	4.5" - 20"
LD-16ASB	2"	Side Belt Drive	8" - 24"	4.5" - 20"	6" - 18"
LD-16ASB-SS	2"	Stainless Steel Side Belt Drive	8" - 24"	4.5" - 20"	6" - 18"
LD-16B	3"	Bottom Side Belt Drive	8" - 36"	7" - 26"	4.5" - 30"