



Professional Packaging Systems

2010 S. Great Southwest Parkway
Grand Prairie, Texas 75051
www.ProPac.com

Contact

Our Packaging Experts
solutions@propac.com
888-318-0083

Roach RA, RC, RD, RJ, RU Gravity Rail Wheel Conveyors


At a Glance

- Commonly floor or rack mounted
- Arranged in two or more mounted parallel
- Lightweight and economical

Pricing

Call us at 888-318-0083

Many options are available. Complete details will need to be finalized to determine requirements and final system costs. Work with your Pro Pac representative to build this machine to your specifications.

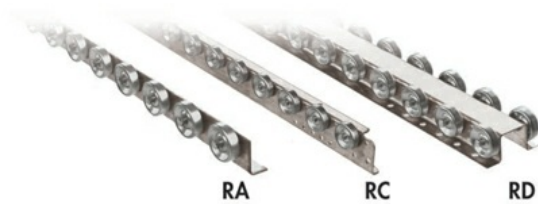

Floor or Rack Mount Economical Conveyors to Transport Goods

Roach RA, RC, RD, RJ, RU rail wheel conveyors are commonly floor or rack mounted in an arrangement of two or more mounted parallel. Rail wheel conveyors are lightweight and economical.

Specifications

Rails: 12 ga. galvanized steel rails are formed to several different configurations, including RA, RC, RD, RJ, and RU rail wheel conveyors.

Wheels: 1-15/16" dia. pre-lubricated ball bearing wheel with hardened raceway, zinc plated, 50 lb. capacity.

Axles: 1/4" dia. galvanized steel bolt-type with lock nut.

Lengths: Available in 1'-0" increments from 1'-0" to 10'-0".

Couplings: Not supplied, specify type required for pricing.

Wheel Centers: 3" centers typical on all patterns.

Please [contact Pro Pac](#) or call 888-318-0083 for your conveyors.

Weight per Feet & Capacity

Model	Lbs per 1'	Lbs per 10'	Max Frame Lb Capacity per Foot w 5' Support Center	Max Frame Lb Capacity per Foot w 10' Support Center
RA	1.7	17	50	6
RC	2.2	22	146	18
RD	3.8	38	125	15
RJ	3.1	31	198	24
RU	2.7	27	113	14

Please [contact Pro Pac](#) or call 888-318-0083 for your conveyors.