



## Professional Packaging Systems

2010 S. Great Southwest Parkway  
Grand Prairie, Texas 75051  
[www.ProPac.com](http://www.ProPac.com)

## Contact

Our Packaging Experts  
[solutions@propac.com](mailto:solutions@propac.com)  
888-318-0083

# Roach CRT Medium-Duty Continuous Rotation Powered Turntable


## At a Glance

- Turn products around in tight quarters
- Suited for a variety of package and product sizes
- Heavy-duty rubber-covered casters support rotation of turntable

## Pricing

Call us at 888-318-0083

Many options are available. Complete details will need to be finalized to determine requirements and final system costs. Work with your Pro Pac representative to build this machine to your specifications.

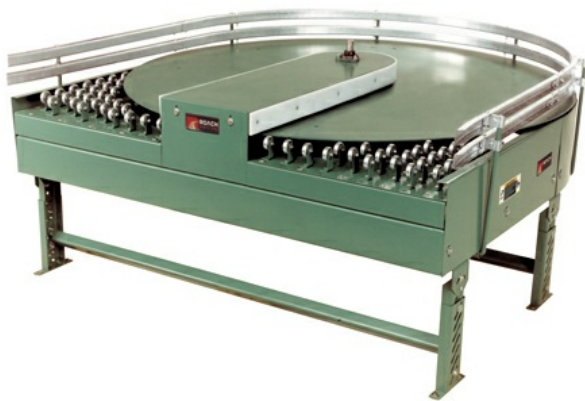

## Turn Product Around in a Small Space

The Roach CRT medium-duty continuous rotation powered turntable are effectively used in tight quarters where large radius curves cannot be positioned. A variety of package sizes can be conveyed on this versatile unit.

## Specifications

**Rotation:** 360° continuous.

**Speed:** 60 FPM at outside diameter.

**Chain Drive:** No. 80 roller chain.

**Chain Guard:** The chain drive is completely enclosed.

**Casters:** Eight (8) 5" dia. heavy duty rubber-covered casters support rotation of turntable carrier platform.

**Skate Wheels:** 1-15/16" dia. zinc-plated skate wheels located at infeed and discharge ends to provide access onto and off of turntable.

**Bearings:** Removable type, heavy duty ball bearing 4-hole flange.

**Elevation:** Minimum 18" to top of plate.

**Carrier Platform:** 1/4" thick steel plate rotates on heavy duty casters to carry unit loads.

**Motor Drive:** 3/4 HP, 230/460/3, 60 cycle, ODP right angle gear motor.

**Capacity:** 500 lbs. maximum load; 150 lbs. maximum unit load.

**Electrical Controls:** Optional.

## Options

**Elevation:** Other height elevations to top of plate available; consult factory.

**Motors:** Available through 2 HP in TEFC, explosion proof, dirty duty, 115/230/1, 575/3, etc.

**Electrical Controls:** Manual start/stop push button switch; magnetic starter; limit switch; photo relay; others available.

Please [contact Pro Pac](#) or call 888-318-0083 for your conveyors.

## Widths & Weights

A	B	Weight (lbs)
3'	38-1/2"	523
4'	50-1/2"	741
6'	74-1/2"	959
8'	98-1/2"	1117

Please [contact Pro Pac](#) or call 888-318-0083 for your conveyors.